

Remote Display

This remote display is designed for use in combination with the RTW timer systems 1180, 1180DCF or 1195. The cable supplied with the unit provides both power and serial data connections.



TECHNICAL SPECIFICATIONS

General


Display:	7-digit LED display, 23.3 mm tall colour green, 1/10 yellow
Weight:	600 g
Dimensions:	190 x 40 x 107 mm
Interface:	Electrical: RS-422 Signals: DCK (data clock) FCK (frame clock) DATA (8 bit slot) Clock rate: DCK 10 kHz FCK 1.25 kHz Format: NRZ, word length 8 bit Bit 0 - 3 segment addresses Bit 4 decimal point Bit 5 - 7 digit addresses Supply: +5 V (logic) +24 V (input voltage) GND (signal) 0 V (input voltage)
Supply voltage:	12 V to 38 V/DC
Current drain:	12 V/320 mA 24 V/160 mA
Connector:	Input 9-pin Sub-D-m Output 9-pin Sub-D-f

Items delivered

- | | |
|----------------------|--|
| Remote display 1183: | <ul style="list-style-type: none"> • Remote display 1183 • Sub-D-connecting cable, 5 m • operating manual |
| | Order number: 1183 |

DIMENSIONS

REMOTE DISPLAY 1183

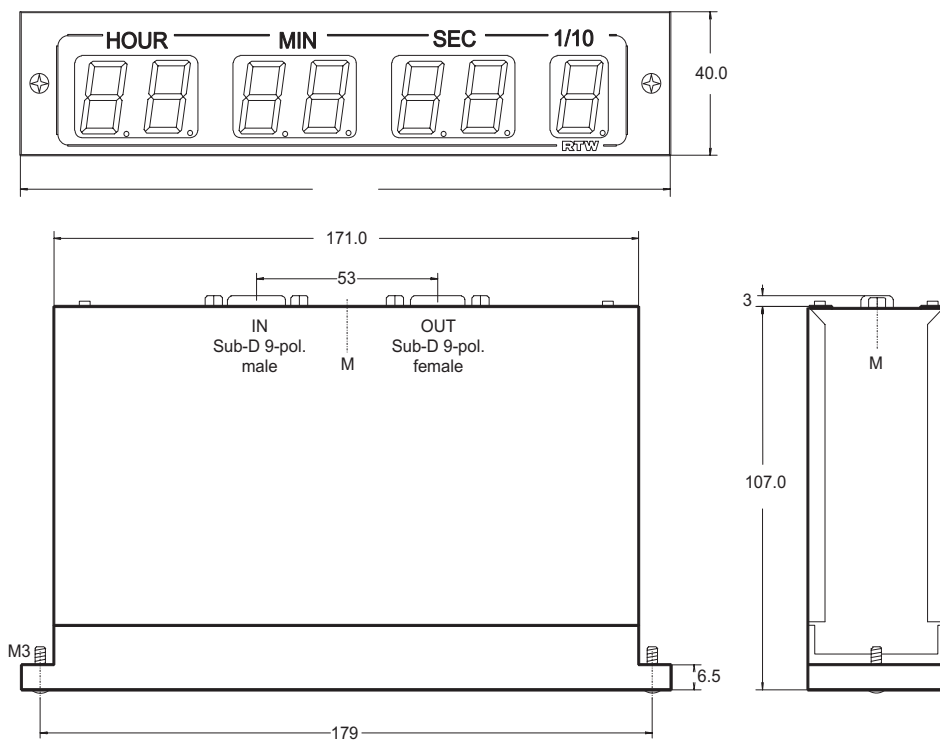

CONNECTION

9-pin Sub-D

Pin assignment:

- 1 - DCK
- 2 - -FCK
- 3 - -DAT
- 4 - +Vin
- 5 - 0 V
- 6 - +FCK
- 7 - +DAT
- 8 - +5 V
- 9 - GND

COLOURS

RAL 7011 Iron grey

ACCESSORIES

Clamping locks,
Fastening kit
Order no.: 13973

Subject to technical changes without prior notice 04/2004